




# Antenna type ARL80R/F150XZ

DIRECTIONAL BROADBAND ANTENNA

**80 ÷ 150** MHz

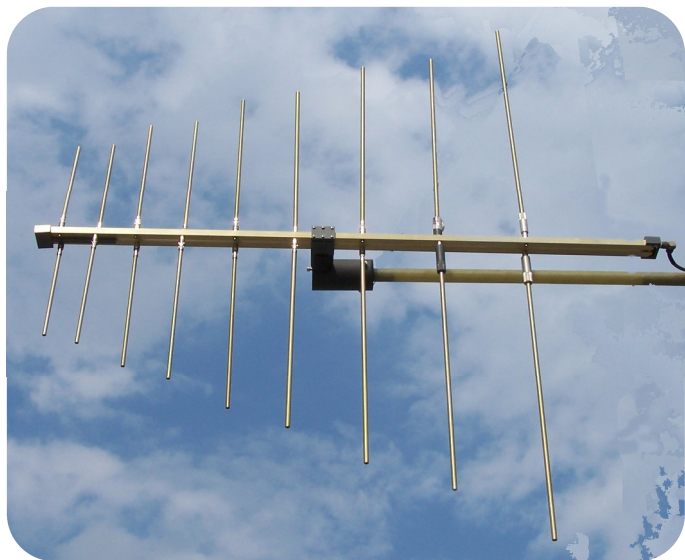

## ELECTRICAL DATA

<b>Frequency range A</b>	MHz	80 ÷ 150
<b>Bandwidth</b>	MHz	70
<b>Gain max .</b>	dBi	8.8
<b>Return loss</b>	dB	≥ -12
<b>VSWR</b>		≤ 1.7:1
<b>Nominal impedance</b>	Ω	50
<b>Polarization</b>	Ω	V/H
<b>H beamwidth 88 Mhz</b>	-3 dB	110°
<b>H beamwidth 110 Mhz</b>	-3 dB	100°
<b>H beamwidth 2000 Mhz</b>	-3 dB	110°
<b>E beamwidth 88 Mhz</b>	-3 dB	60°
<b>E beamwidth 110 Mhz</b>	-3 dB	60°
<b>E beamwidth 140 Mhz</b>	-3 dB	70°
<b>Max Power</b>	W	200 W

<b>Connector</b>	Nf
<b>Lightning protection</b>	All metal parts are D.C. grounded

## MECHANICAL DATA

<b>Dimension length</b>	mm	length 1580X h 1850x130
<b>Elements numbers</b>		9
<b>Weight without clamp</b>	kg	4.8
<b>Wind surface</b>	m <sup>2</sup>	Front 0.03 side 0.17
<b>Front wind load</b>	Kg	1.1 ( 25 m/s )
<b>Side wind load</b>	Kg	6.5 ( 25 m/s )
<b>Mounting +/- 90°</b>	mm	standard polarizer Ø 30

## MATERIALS


**Anticorodal aluminium - Brass - Teflon**  
**- Polyvinyl chloride - RoHS compliance**

## ACCESSORIES


<b>SUPIS01</b>	Isolation fiberglass pole ø 35 x 1000
<b>BAG80150</b>	Transport bag

## ORDERING AND PACKAGING INFORMATIONS


ARL80 <b>F</b> 150XZ	With unscrewed elements
ARL80 <b>R</b> 150XZ	With folding elements
<b>PACKAGING</b> mm.	1600x200x200 / weight 6 Kg without clamps




88 Mhz E plane




88 Mhz H plane




110 Mhz E plane



110 Mhz H plane




140 Mhz E plane




140 Mhz H plane

ARL80R/F150 GAIN

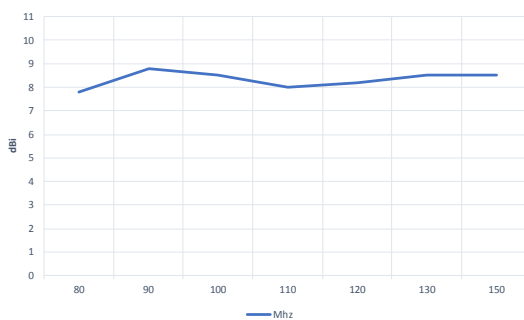

ARL80R/F150 TY.RETURN LOSS

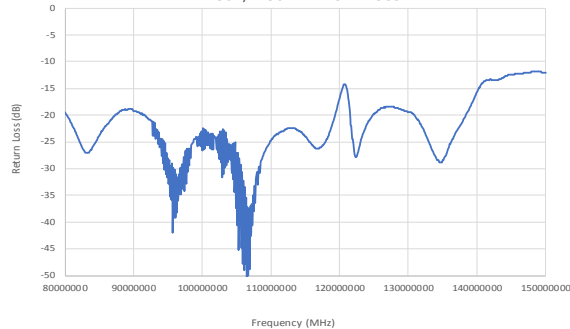

In relazione alle normative in materia di responsabilità sui prodotti, segnaliamo che nel caso di utilizzo delle nostre antenne in condizioni operative particolari, quali ad esempio forti sollecitazioni dinamiche dovute a vento, vibrazioni o deformazioni delle strutture di sostegno, si possono verificare rotture del prodotto stesso e/o la caduta a terra. L'installatore che deve essere altamente qualificato, deve conoscere le normative nazionali di sicurezza in vigore, deve seguire sempre l'adeguatezza del prodotto stesso alle condizioni operative del sito di installazione e deve controllare l'installazione operando la manutenzione periodica dell'impianto. --- In relation to the laws concerning product liability, we notify you that in case you use our antennas in severe operative conditions such as, for example, strong wind, vibrations or distortions of the support structure, the product can break and/or fall down. The person who install the product must be skilled, must know the national security law in force, must follow the product instructions, must check that the product is compatible with the installation site and must control the installation with periodical maintenance.