



ELECTRICAL DATA

Frequency range A	MHz	470 ÷ 700
Bandwidth	MHz	230
Gain max .	dBi	12
Return loss	dB	≥ -14
VSWR		≤ 1.5:1
Nominal impedance	Ω	50
Polarization	Ω	V/H
H beamwidth 480 Mhz	-3 dB	44°
H beamwidth 600 Mhz	-3 dB	48°
H beamwidth 750 Mhz	-3 dB	60°
E beamwidth 480 Mhz	-3 dB	40°
E beamwidth 600 Mhz	-3 dB	42°
E beamwidth 750 Mhz	-3 dB	42°
Max Power	W	300 W
Connector		Nf
Lightning protection	All metal parts are D.C. grounded	

MECHANICAL DATA

Dimension length	mm	1250X340x70
Elements numbers		17
Weight without clamp	kg	1.9
Wind surface	m ²	Front 0.01 side 0.03
Front wind load	Kg	0.15 (25 m/s)
Side wind load	Kg	2.1 (25 m/s)
Mounting +/- 90°	mm	standard polarizer Ø 30

MATERIALS


Anticorodal aluminium - Brass - Teflon
- Polyvinyl chloride - RoHS compliance

ACCESSORIES


SUPIS01	Isolation fiberglass pole Ø 35 x 1000
BAG470F700	Transport bag

ORDERING AND PACKAGING INFORMATIONS


PACKAGING mm. | 1280x200x200 / weight 2.5 Kg




480 Mhz E plane




480 Mhz H plane




600 Mhz E plane





600 Mhz H plane



750 Mhz E plane



750 Mhz H plane

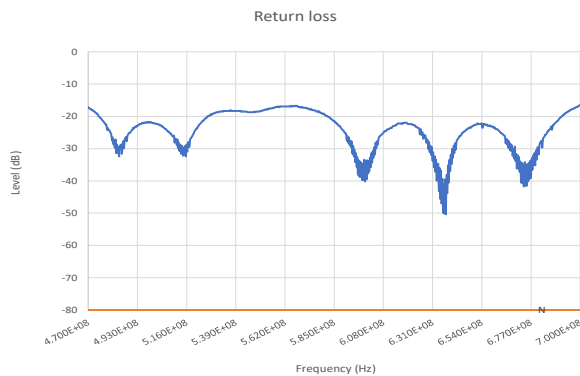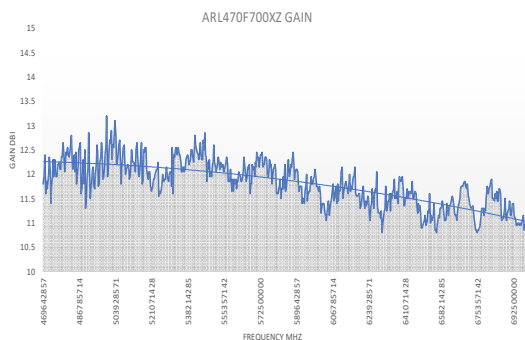

In relazione alle normative in materia di responsabilità sui prodotti, segnaliamo che nel caso di utilizzo delle nostre antenne in condizioni operative particolari, quali ad esempio forti sollecitazioni dinamiche dovute a vento, vibrazioni o deformazioni delle strutture di sostegno, si possono verificare rotture del prodotto stesso e/o la caduta a terra. L'installatore che deve essere altamente qualificato, deve conoscere le normative nazionali di sicurezza in vigore, deve verificare sempre l'adeguatezza del prodotto stesso alle condizioni operative del sito di installazione e deve controllare l'installazione operando la manutenzione periodica dell'impianto. --- In relation to the laws concerning product liability, we notify you that in case you use our antennas in severe operative conditions such as, for example, strong wind, vibrations or distortions of the support structure, the product can break and/or fall down. The person who install the product must be skilled, must know the national security law in force, must follow the product instructions, must check that the product is compatible with the installation site and must control the installation with periodical maintenance.